

Standardly offered variations of packers




Division of grouting packers by construction:

OPK - Grouting steel packer combi




Standard OPK packer: screw without head, ended with a tension nut, clamping rubber, thrust piece, round head nipple.

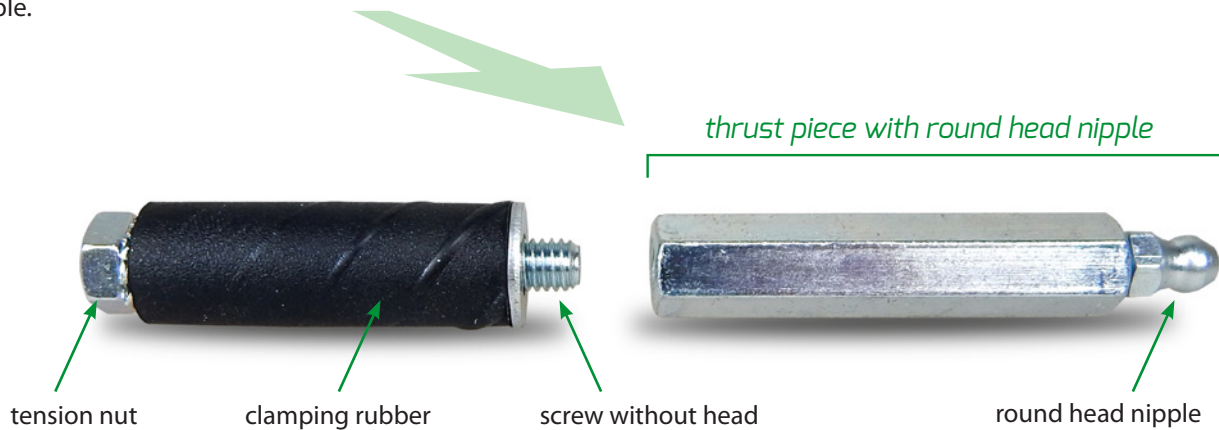

OPD - Grouting steel packer with double-casing



Standard OPD packer: screw without head, ended with a tension nut, clamping rubber, round head nipple with coupling sleeve.

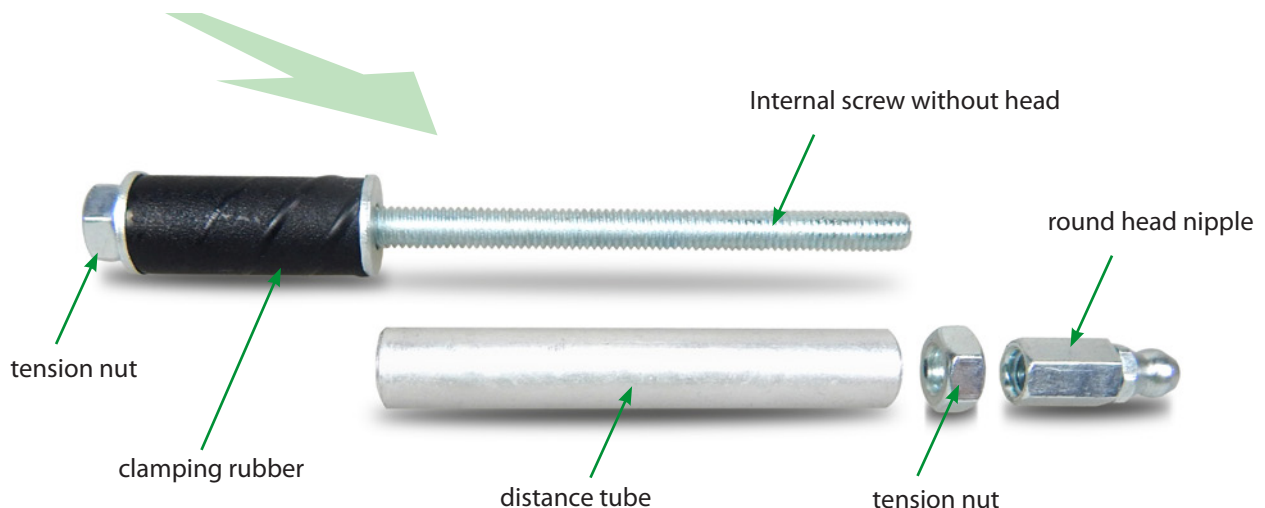

Example of the naming of packers:



OPK 13-90-M-6 (L-DG-AM)



OPK 12-110-M-6 (V-DV)




OPD 13-115-M-6 (P6)



OPK 13-110-M-6 (L-T-AM)



OPK 13-100-M-6 (P8)

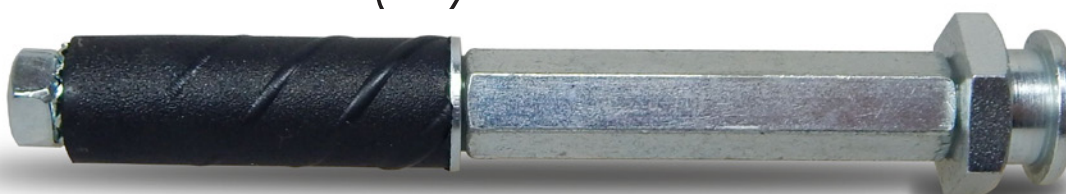

At customer's request we are able to produce:

OPK packers with clamping rubber Ø 8-17, total length 70-1000 mm and screw M5, M6 and M8.

OPD packers with clamping rubber Ø 8-32, total length 80-3000 mm and inner screw M5, M6, M8 and M10.